

Product Overview

These free space modulators operate at 110MHz and at various wavelength ranges covering the 450-700 nm and 700-1100 nm. The intended application can be amplitude modulation as well as frequency shifting (fixed and variable).




Features

- Small rise time
- Linear polarization
- High diffraction efficiency

		Units	Min	Nom	Max
Material-Acoustic mode-Velocity			TeO2 [L] – 4200 m/s		
Optical Wavelength range (AR coated) (λ)	VIS	nm	450		700
	IR		700		1100
Carrier Frequency / Frequency shift		MHz	+/-110		
Transmission		%	95	98	
Input / Output Polarization			Linear / Linear		
Active Aperture		mm ²	1.5 x 2		
Beam diameter (1/e ²)(φ)		mm	0.5		1.2
Rise/fall time (T _r)		ns	80		192
Analog Amplitude Modulation Bandwidth (-3dB) (F _{-3dB})		MHz			6
Separation Angle (0-1)	VIS	mrd	11.8		18.3
	IR		18.3		28.8
Static Extinction Ratio		dB	30		
*Diffraction Efficiency (η)		%	85		
Optical power density (CW)	VIS	W/mm ²			5
	IR				10
Input impedance		Ω		50	
V.S.W.R.				< 1.2:1	
RF Power (P)	VIS	W			1,2
	IR				2,2
Size		mm ³	50.9 x 22.4 x 17.3		
Weight		g		50	
Packaging			IN PRO 004		
Operating Temperature (non condensing)		°C	+10	+25	+40
Storage Temperature (non condensing)		°C	-20		+50
RoHS Compliance			Yes		
OPTION MT110-B50A1.5-xx			Frequency range 110+/-25MHz, IN PRO 005 for IR and 1064nm versions, Efficiency typ >60% over full range		

*Beam diameter and wavelength dependent.

$$T_r = 0.66 \frac{\phi}{v} * F_{-3dB} = \frac{0.48}{T_r} * \Delta\theta = \frac{\lambda F}{v} * \frac{P_1}{P_2} = \frac{\lambda_1}{\lambda_2}$$

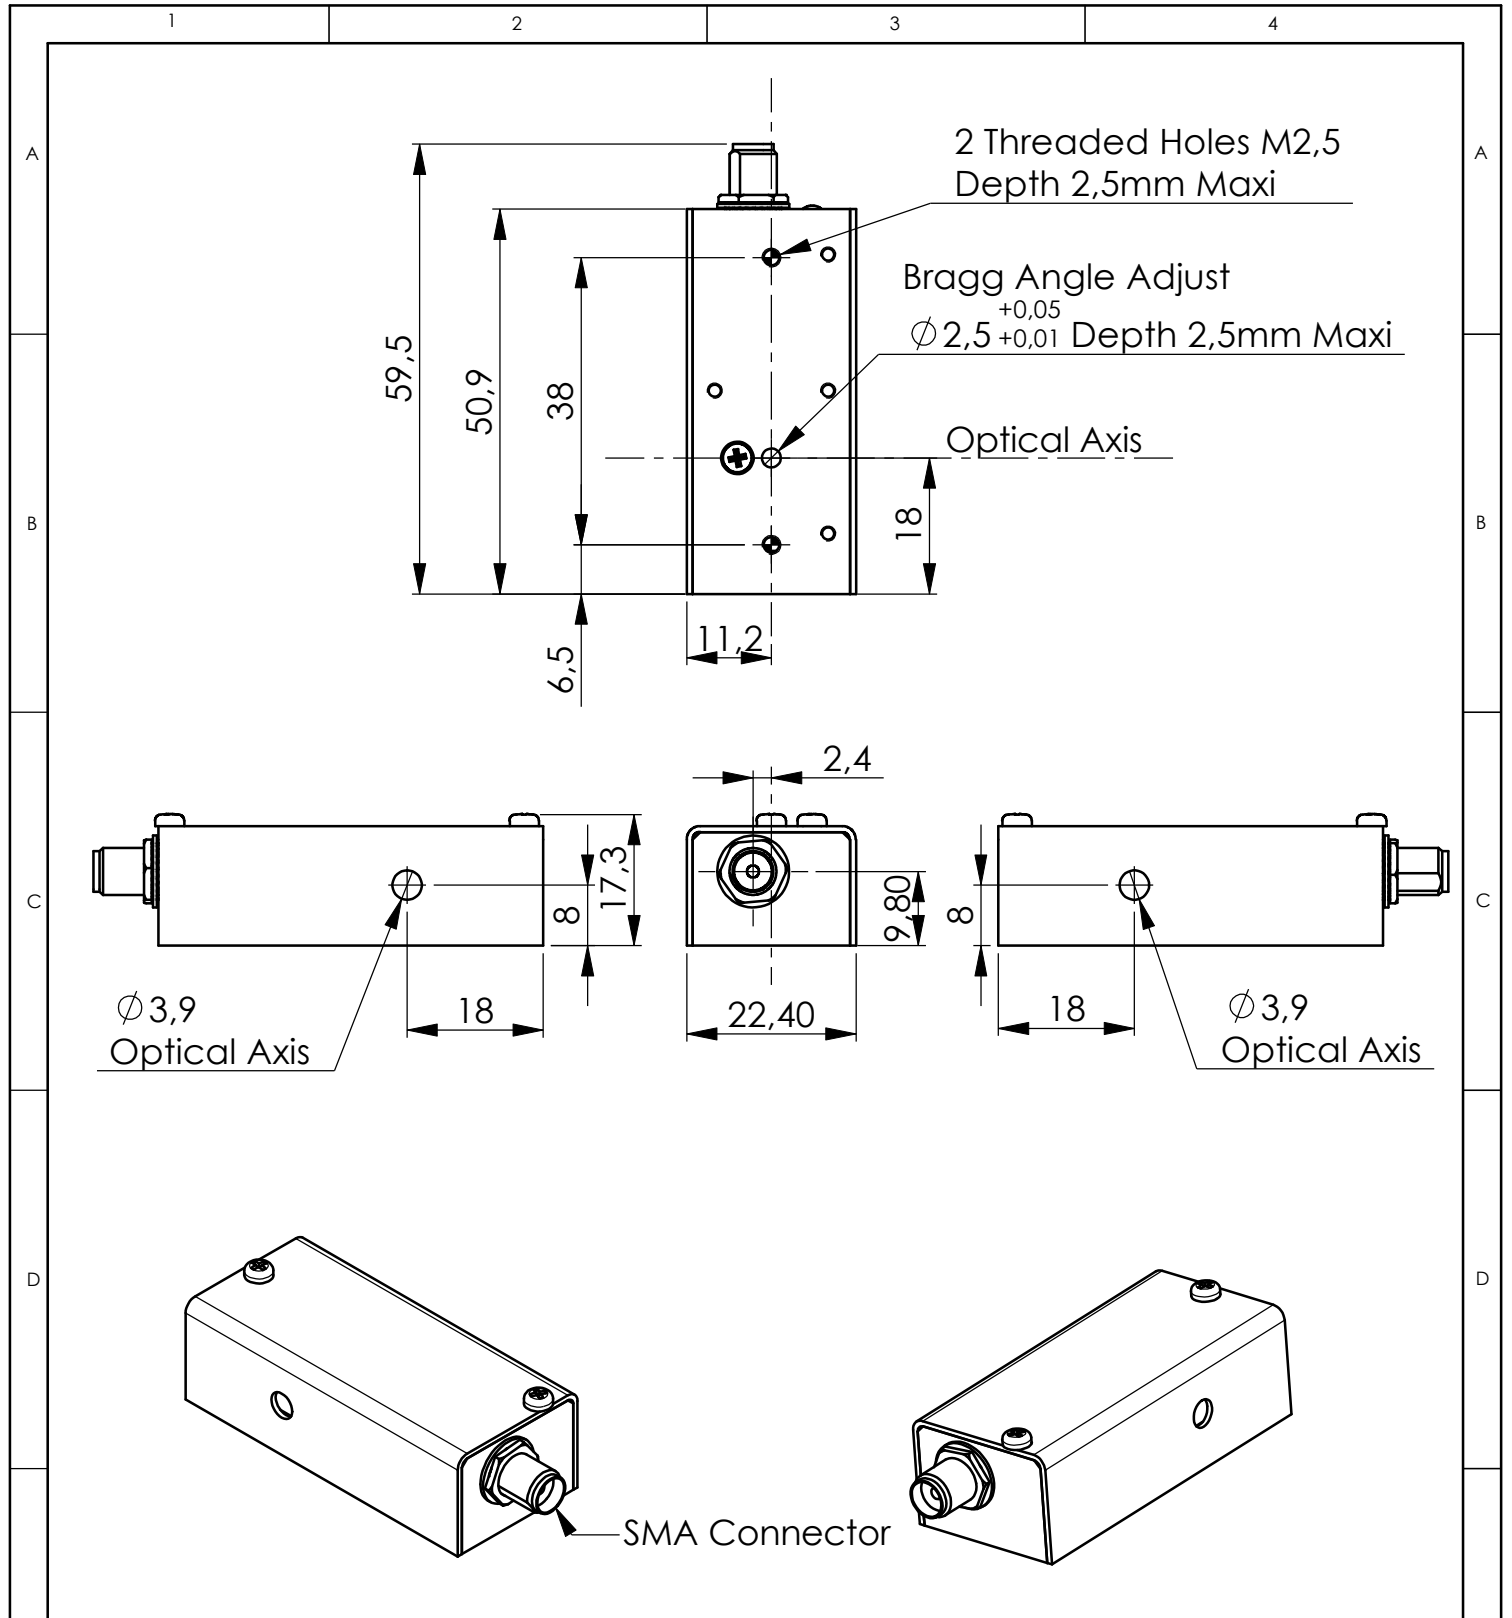


B	18/12/06	E.D	Mise en page
A	15/10/03	OGB	Plan initial / Initial Drawing
Index	Date	Auteur Author	Modifications
Conception Design	E.D	PLAN D'INTERFACE / OUTLINE DRAWING	
Vérification Checking	E.D		
Tolérance Tolerance	ISO 2768mK	Référence / Reference	
Echelle Scale	1:1	IN-PRO-004	
	Format A4	Ce document est la propriété de A.A.SA. Il est strictement interdit de reproduire ce document ou une partie sans l'autorisation de A.A.SA. This document is the property of A.A.SA. It is strictly prohibited to reproduce this document or a part without the authorization of A.A.SA.	



OPTO-ELECTRONIC

A.A. SA OPTO-ELECTRONIQUE DIVISION
 18, rue Nicolas Appert
 F-91898 ORSAY
 tel : 08 11 09 76 76
 fax : 01 76 91 50 31

Folio / Sheet	Indice / Index
1/1	B

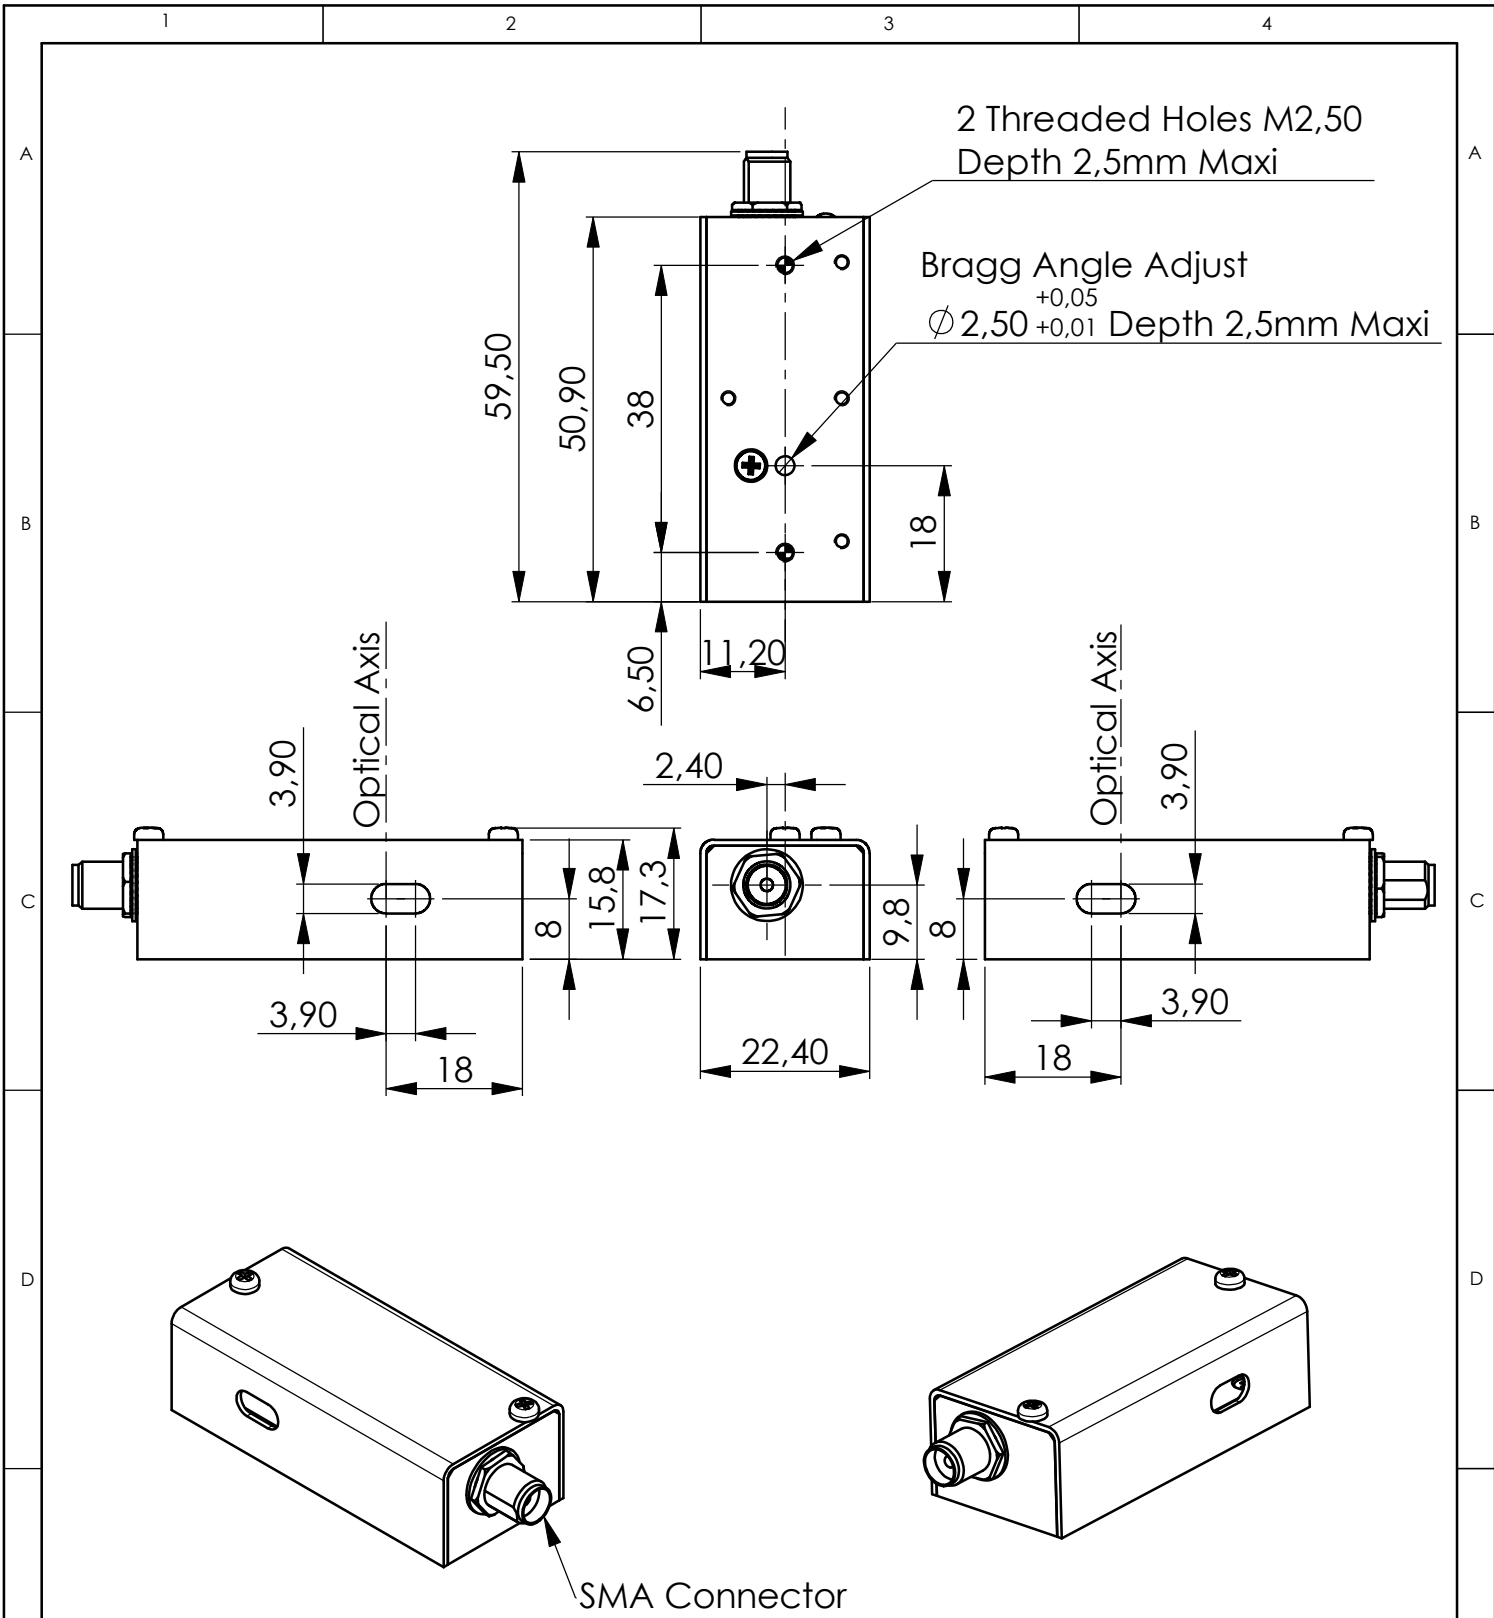

B	18/12/06	E.D	Reprise mise en plan	
A	15/10/03	F.C	Plan initial / Initial Drawing	
Index	Date	Auteur Author	Modifications	
Conception Design	E.D	PLAN D'INTERFACE / OUTLINE DRAWING		
Vérification Checking	L.F			
Tolérance Tolerance	ISO 2768mK	Référence / Reference IN-PRO-005		
Echelle Scale	1:1	 OPTO-ELECTRONIC A.A. SA OPTO-ELECTRONIQUE DIVISION 18, rue Nicolas Appert F-91898 ORSAY tel : 08 11 09 76 76 fax : 01 76 91 50 31		
	Format A4			Ce document est la propriété de A.A.SA. Il est strictement interdit de reproduire ce document ou une partie sans l'autorisation de A.A.SA. This document is the property of A.A.SA. It is strictly prohibited to reproduce this document or a part without the authorization of A.A.SA.