

Product Overview

These free space modulators have been specially designed for general purposes high speed applications. They are dedicated for IR lasers in the range of 1300-1600 nm. Their carrier frequency of 80 MHz will enable a fix frequency of 80 MHz as well as a variable frequency shift of 80 +/- 21 MHz. In addition, they can be used for intensity modulation with small rise time.




Features

- Small rise time
- Linear/random polarization
- High diffraction efficiency
- Large RF bandwidth.

	Units	Min	Nom	Max
Material-Acoustic mode-Velocity		TeO2 [L] – 4200 m/s		
Optical Wavelength range (AR coated) (λ)	nm	1300	1550	1600
Carrier Frequency / Frequency shift	MHz	+/-80		
Transmission	%	95	98	
Input / Output Polarization		Linear / Linear		
Active Aperture	mm ²	0.7 x 2		
Beam diameter (1/e ²)(φ)	mm	0.4		0.6
Rise/fall time (T _r)	ns	64		96
Analog Amplitude Modulation Bandwidth (-3dB) (F _{-3dB})	MHz			7.5
Separation Angle (0-1)	mrd	24.7	29.5	30.5
Static Extinction Ratio	dB	33		
*Diffraction Efficiency (η)	%	70	75	
Optical power density	W/mm ²			10
Input impedance	Ω		50	
V.S.W.R.			< 1.2:1	
RF Power (P)	W		2.2	2.5
Connector		SMA female		
Size	mm ³	50.9 x 22.4 x 17.3		
Weight	g		50	
Packaging		IN PRO 004		
Operating Temperature (non condensing)	°C	+10	+25	+40
Storage Temperature (non condensing)	°C	-20		+50
RoHS Compliance		Yes		
OPTION MT80-B42A0.7-1300.1600		Frequency range 80+/-21MHz, Scan angle 15.5mrd @1.55μm, Efficiency >40% over full range		

* Diffraction efficiency is beam diameter and wavelength dependent.

$$T_r = 0.66 \frac{\phi}{V} * F_{-3dB} = \frac{0.48}{T_r} * \Delta\theta = \frac{\lambda F}{V} * \frac{P_1}{P_2} = \frac{\lambda_1}{\lambda_2}$$

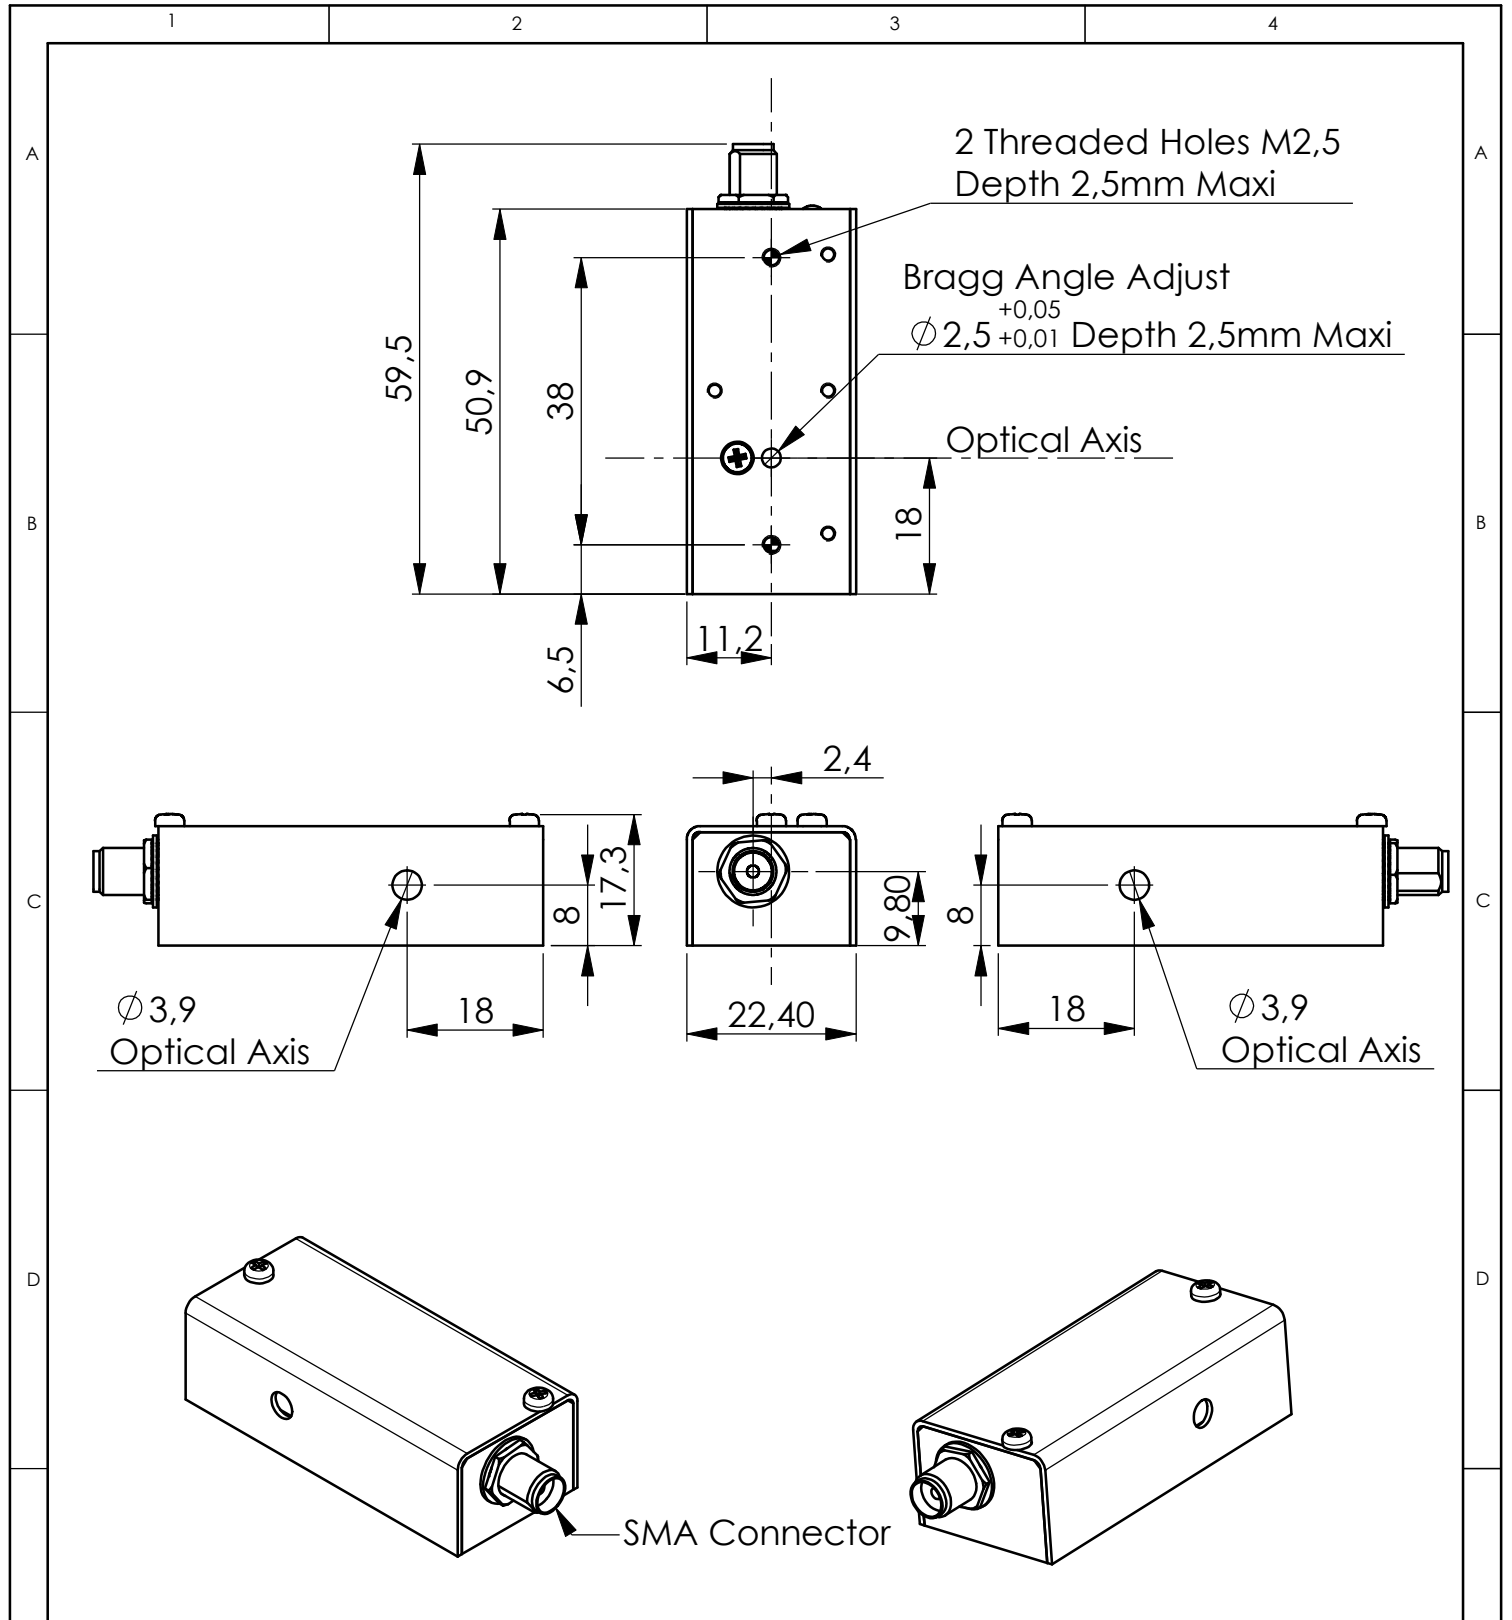

B	18/12/06	E.D	Mise en page
A	15/10/03	OGB	Plan initial / Initial Drawing
Index	Date	Auteur Author	Modifications
Conception Design	E.D	PLAN D'INTERFACE / OUTLINE DRAWING	
Vérification Checking	E.D		
Tolérance Tolerance	ISO 2768mK	Référence / Reference	
Echelle Scale	1:1	IN-PRO-004	
	Format A4	Ce document est la propriété de A.A.SA. Il est strictement interdit de reproduire ce document ou une partie sans l'autorisation de A.A.SA. This document is the property of A.A.SA. It is strictly prohibited to reproduce this document or a part without the authorization of A.A.SA.	
		Folio / Sheet 1/1	Indice / Index B



OPTO-ELECTRONIC
 A.A. SA OPTO-ELECTRONIQUE DIVISION
 18, rue Nicolas Appert
 F-91898 ORSAY
 tel : 08 11 09 76 76
 fax : 01 76 91 50 31